




ESPULSORE A TESTA CILINDRICA NITRURATO IN POLLICI
NITRIDED EJECTOR PIN IN INCHES
 AUSWERFERSTIFT NITRIERT UM ZOLL

EES-2CP

Acciaio: Per pressofusione ed iniezione
Steel: For die casting and injection
Stahl: Für Druckguss und Spritzguss

Durezza: Superficie > 950 Vickers - HV 0,3 Testa HRC 45±5
Hardness: Surface > 950 Vickers - HV 0,3 Head HRC 45±5
Härte: Oberfläche > 950 Vickers - HV 0,3 Kopf HRC 45±5

Resistenza alla trazione: 1300/1450 N/mm²
Tensile strenght: 1300/1450 N/mm²
Zugfestigkeit: 1300/1450 N/mm²

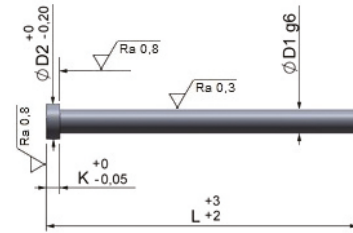

D1	D2	K	L							
			4"	6"	8"	10"	14"	18"	25"	
1/8	1/4	1/8	-	-	-	-	-	-	-	-
5/32	9/32	5/32	-	-	-	-	-	-	-	-
3/16	3/8	3/16	-	-	-	-	-	-	-	-
7/32	13/32	3/16	-	-	-	-	-	-	-	-
1/4	7/16	3/16	-	-	-	-	-	-	-	-
5/16	1/2	1/4	-	-	-	-	-	-	-	-
3/8	5/8	1/4	-	-	-	-	-	-	-	-
7/16	11/16	1/4	-	-	-	-	-	-	-	-
1/2	3/4	1/4	-	-	-	-	-	-	-	-
5/8	7/8	1/4	-	-	-	-	-	-	-	-
3/4	1"	1/4	-	-	-	-	-	-	-	-
1"	1" 1/4	1/4	-	-	-	-	-	-	-	-

Esempio di ordinativo: D1xL **Order example:** D1xL **Bestellbeispiel:** D1xL